

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



18 FEB 2005

(43) International publication date
11 March 2004 (11.03.2004)

PCT

(10) International publication number
WO 2004/020146 A1

(51) International patent classification⁷: B24B 7/28, 7/02

(21) International application number: PCT/DE2003/002439

(22) International filing date: 22 July 2003 (22.07.2003)

(25) Language of filing: German

(26) Language of publication: German

(30) Data relating to the priority:
102 39 191.2 21 August 2002 (21.08.2002) DE

(71) Applicant and

(72) Inventors: HEESEMANN, Jürgen [DE/DE]; Bessinger
Strasse 27, 32547 Bad Oeynhausen (DE).

(74) Attorney: LINS, Edgar, Gramm, Lins & Partner GbR,
Theodor-Heuss-Strasse 1, 38122 Braunschweig (DE).

(81) Designated states (*national*): AE, AG, AL, AM, AT, AU, AZ,
BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ,

DE (utility model), DK, DM, DZ, EC, EE, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP,
KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV,
MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO,
NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG,
SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated states (*regional*): ARIPO patent (GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD,
RU, TJ, TM), European patent (AT, BE, BG, CH,
CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE,
IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI
patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


as to applicant's entitlement to apply for and be
granted a patent (Rule 4.17(ii)) for all designations

[continued on next page]

As printed

(54) Title: GRINDING MACHINE AND METHOD FOR GRINDING A WORKPIECE

(54) Bezeichnung: SCHLEIFMASCHINE UND VERFAHREN ZUM SCHLEIFEN EINES WERKSTÜCKS

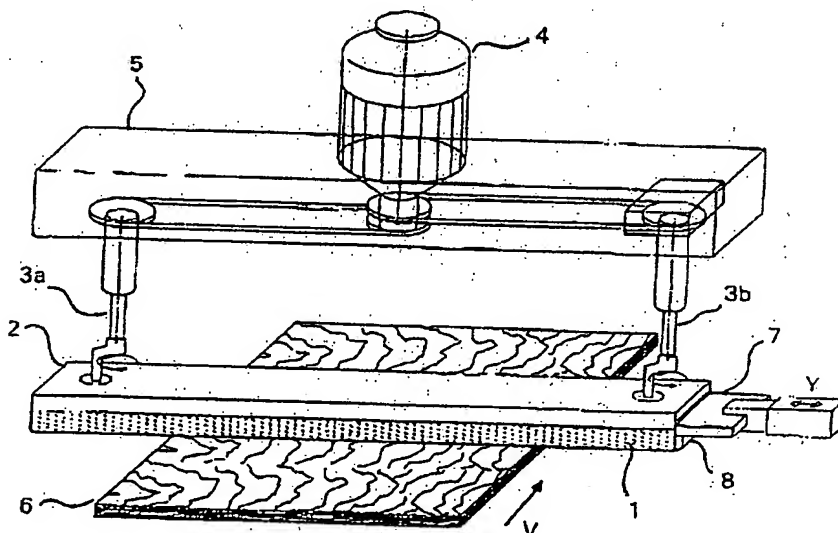

(57) Abstract: Disclosed is a grinding machine comprising oscillating driving means (3, 4) for setting grinding means (1) into an oscillating grinding motion and an actuation device (7) that is provided with a plurality of actuation areas (8) which can be triggered such that different zones of the grinding means (1) are alternately actuated independently of the oscillating grinding motion.

[Fortsetzung auf der nächsten Seite]

[continued on next page]

WO 2004/020146 A1